

LMHP...LUU 尼龙保持架

该类型尺寸是公制的，广泛应用于亚洲和其它国家。

所有型号均可根据客户要求做镀镍处理，有防锈作用。

LMHP...LUU (Resin retainer)

This type is a metric dimension series widely used in Asia and other countries.

All models can be done with nickle plated according to customers' requirements, with function of rust-proof.




LMHP...LUU

公称轴径 Nominal shaft diameter mm	加长导向椭圆法兰 LMHP...LUU	重量 Weight (g)	主要尺寸和公差 Major dimensions and tolerance					
			dr		D		L	
			mm	公差 Tolerance μ m	mm	公差 Tolerance μ m	mm	公差 Tolerance μ m
6	LMHP6LUU	28	6	0 -10	12	0	35	± 300
8	LMHP8LUU	47	8		15	-13	45	
10	LMHP10LUU	90	10		19		55	
12	LMHP12LUU	102	12		21	0	57	
13	LMHP13LUU	123	13		23	-16	61	
16	LMHP16LUU	182	16	0 -12	28		70	
20	LMHP20LUU	247	20		32	0	80	
25	LMHP25LUU	525	25		40	-19	112	
30	LMHP30LUU	645	30		45		123	
35	LMHP35LUU	950	35		52	0	135	
40	LMHP40LUU	1,450	40	0 -15	60	-22	151	
50	LMHP50LUU	3,467	50		80		192	

密封型 Seal type:

LMHP20 L A UU	不标 UU	不带密封 双密封	No entry UU	No seals Seal on both sides
A	镀镍	A	Nickle plated	

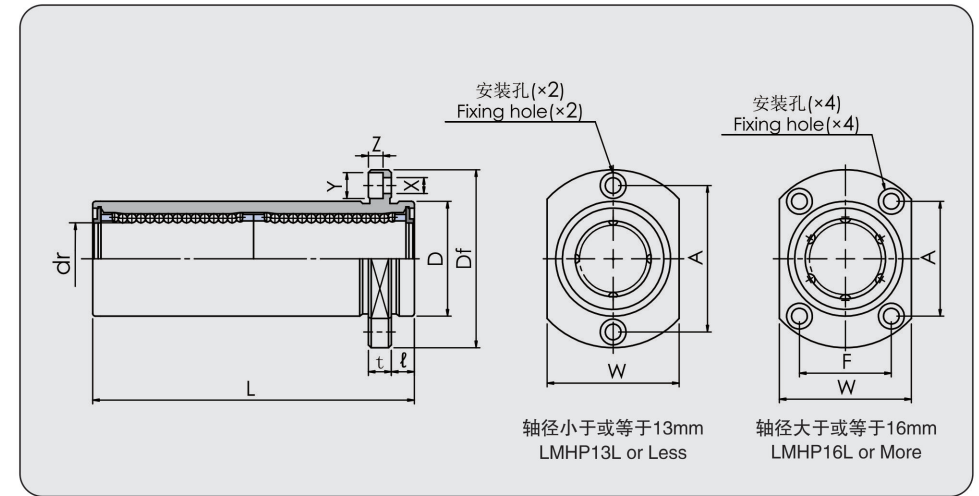

主要尺寸和公差 Major dimensions and tolerance									偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating	
法兰 Flange											动负荷 Dynamic C N	静负荷 Static Co N
ℓ mm	Df mm	W mm	t mm	A mm	F mm	X mm	Y mm	Z mm				
5	28	18	5	20	-	3.5	6	3.1	15	15	323	529
5	32	21	5	24	-	3.5	6	3.1			431	784
6	40	25	6	29	-	4.5	7.5	4.1			588	1,100
6	42	27	6	32	-	4.5	7.5	4.1			813	1,570
6	43	29	6	33	-	4.5	7.5	4.1			813	1,570
6	48	34	6	31	22	4.5	7.5	4.1	20	20	1,230	2,350
8	54	38	8	36	24	5.5	9	5.1			1,400	2,740
8	62	46	8	40	32	5.5	9	5.1			1,560	3,140
10	74	51	10	49	35	6.6	11	6.1			2,490	5,490
10	82	60	10	55	38	6.6	11	6.1			2,650	6,270
13	96	70	13	64	45	9	14	8.1	25	25	3,430	8,040
13	116	90	13	80	56	9	14	8.1			6,080	15,900

国际单位: 1N ≈ 0.102kgf
SIUNIT: 1N ≈ 0.102kgf