

LMHP...UU 尼龙保持架

该类型尺寸是公制的，广泛应用于亚洲和其它国家。

所有型号均可根据客户要求做镀镍处理，有防锈作用。

LMHP...UU (Resin retainer)

This type is a metric dimension series widely used in Asia and other countries.

All models can be done with nickle plated according to customers' requirements, with function of rust-proof.




LMHP...UU

公称轴径 Nominal shaft diameter mm	导向椭圆法兰 LMHP...UU	重量 Weight (g)	主要尺寸和公差 Major dimensions and tolerance					
			dr		D		L	
			mm	公差 Tolerance μ m	mm	公差 Tolerance μ m	mm	公差 Tolerance μ m
6	LMHP6UU	21	6	0 -9	12	0	19	± 300
8	LMHP8UU	33	8		15	-13	24	
10	LMHP10UU	64	10		19		29	
12	LMHP12UU	68	12		21	0	30	
13	LMHP13UU	81	13		23	-16	32	
16	LMHP16UU	112	16	0 -10	28		37	
20	LMHP20UU	167	20		32	0	42	
25	LMHP25UU	325	25		40	-19	59	
30	LMHP30UU	388	30		45		64	
35	LMHP35UU	580	35		52	0	70	
40	LMHP40UU	920	40	0 -12	60	-22	80	
50	LMHP50UU	2,067	50		80		100	

密封型 Seal type:

LMHP20 A UU

不标	不带密封	No entry	No seals
UU	双密封	UU	Seal on both sides
A	镀镍	A	Nickle plated

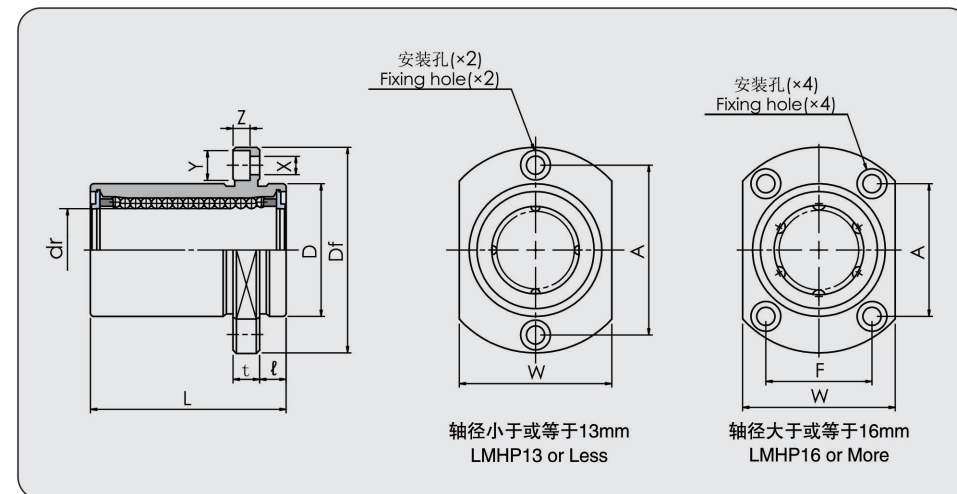

主要尺寸和公差 Major dimensions and tolerance									偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating	
法兰 Flange											动负荷 Dynamic Co N	静负荷 Static Co N
ℓ mm	Df mm	W mm	t mm	A mm	F mm	X mm	Y mm	Z mm	12	12	206	265
5	28	18	5	20	–	3.5	6	3.1			274	392
6	40	25	6	29	–	4.5	7.5	4.1			372	549
6	42	27	6	32	–	4.5	7.5	4.1			510	784
6	43	29	6	33	–	4.5	7.5	4.1			510	784
6	48	34	6	31	22	4.5	7.5	4.1	15	15	774	1,180
8	54	38	8	36	24	5.5	9	5.1			882	1,370
8	62	46	8	40	32	5.5	9	5.1			980	1,570
10	74	51	10	49	35	6.6	11	6.1			1,570	2,740
10	82	60	10	55	38	6.6	11	6.1			1,670	3,140
13	96	70	13	64	45	9	14	8.1	20	20	2,160	4,020
13	116	90	13	80	56	9	14	8.1			3,820	7,940

国际单位：1N≈0.102kgf
SIUNIT: 1N≈0.102kgf