

LMHP...UU-MX 尼龙保持架

该类型尺寸是公制的，广泛应用于亚洲和其它国家。

所有型号均可根据客户要求做镀镍处理，有防锈作用。

LMHP...UU-MX (Resin retainer)

This type is a metric dimension series widely used in Asia and other countries.

All models can be done with nickle plated according to customers' requirements, with function of rust-proof.



LMHP...UU-MX

公称轴径 Nominal Shaft diameter mm	带润滑装置 导向椭圆法兰 LMHP...UU-MX	重量 Weight (g)	钢球 列数 Ball circuit	主要尺寸和公差 Major dimensions and tolerance						
				dr		D		L	L1	E
				mm	公差 Tolerance μ m	mm	公差 Tolerance μ m			
10	LMHP10UU-MX	68	4	10		19		39	29	5
12	LMHP12UU-MX	72		12	0 -9	21	0 -16	41	30	5.5
16	LMHP16UU-MX	119		16		28		49	37	6
20	LMHP20UU-MX	178	5	20		32		56	42	7
25	LMHP25UU-MX	344		25	0 -10	40	0 -19	77	59	9
30	LMHP30UU-MX	412		30		45		84	64	10
35	LMHP35UU-MX	603	6	35		52		92	70	11
40	LMHP40UU-MX	946		40	0 -12	60	0 -22	104	80	12
50	LMHP50UU-MX	2100		50		80		128	100	14

密封型 Seal type:


LMHP20 A UU-MX

UU 双密封

UU Seal on both sides

A 镀镍

A Nickle plated

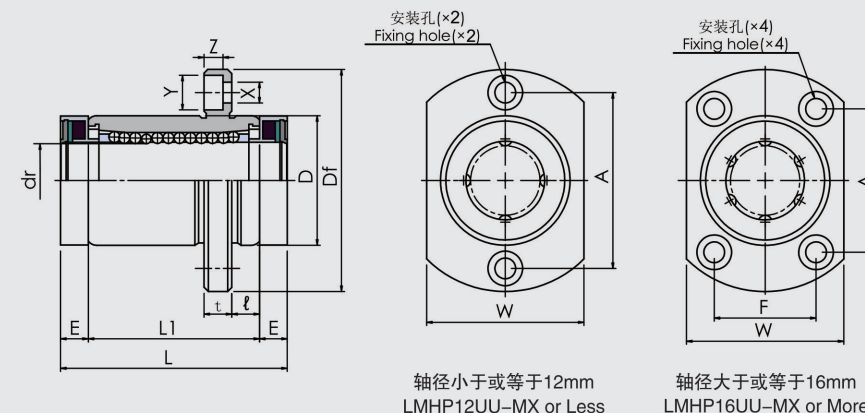

主要尺寸和公差 Major dimensions and tolerance									偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating	
法兰 Flange											动负荷 Dynamic Co N	静负荷 Static Co N
ℓ mm	Df mm	W mm	t mm	A mm	F mm	X mm	Y mm	Z mm				
6	40	25	6	29	—	4.5	7.5	4.1	12	12	372	549
6	42	27	6	32	—	4.5	7.5	4.1			510	784
6	48	34	6	31	22	4.5	7.5	4.1			774	1180
8	54	38	8	36	24	5.5	9	5.1	15	15	882	1370
8	62	46	8	40	32	5.5	9	5.1			980	1570
10	74	51	10	49	35	6.6	11	6.1			1570	2740
10	82	60	10	55	38	6.6	11	6.1	20	20	1670	3140
13	96	70	13	64	45	9	14	8.1			2160	4020
13	116	90	13	80	56	9	14	8.1			3820	7940

国际单位: 1N≈0.102kgf
SIUNIT: 1N≈0.102kgf