

LMH...GA 耐高温保持架


该类型尺寸是公制的，广泛应用于亚洲和其它国家。

所有型号均可根据客户要求做镀镍处理，有防锈作用。

LMH...GA (High-temperature Resistant Retainer)

This type is a metric dimension series widely used in Asia and other countries.


All models can be done with nickle plated according to customers' requirements, with function of rust-proof.

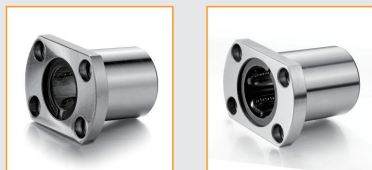

LMH...GA

公称轴径 Nominal shaft diameter mm	椭圆法兰 LMH...GA	重量 Weight (g)	主要尺寸和公差 Major dimensions and tolerance					
			dr		D		L	
			mm	公差 Tolerance μ m	mm	公差 Tolerance μ m	mm	公差 Tolerance μ m
4	LMH4GA	7	4	0/-8	8	0/-11	12	± 300
5	LMH5GA	16.5	5	0 -9	10	0 -13	15	
6	LMH6GA	22.3	6		12		19	
8	LMH8GA	35.3	8		15		24	
10	LMH10GA	65.5	10		19		29	
12	LMH12GA	73.2	12		21		30	
13	LMH13GA	88	13		23	0 -16	32	
16	LMH16GA	129	16	0 -10	28		37	
20	LMH20GA	192	20		32		42	
25	LMH25GA	387	25		40	0 -19	59	
30	LMH30GA	464	30		45		64	
35	LMH35GA	679	35	0 -12	52	0 -22	70	
40	LMH40GA	1,065	40		60		80	
50	LMH50GA	2,067	50		80		100	

LMH20 A GA	GA	钢保持架	GA	Steel retainer
	A	镀镍	A	Nickle plated

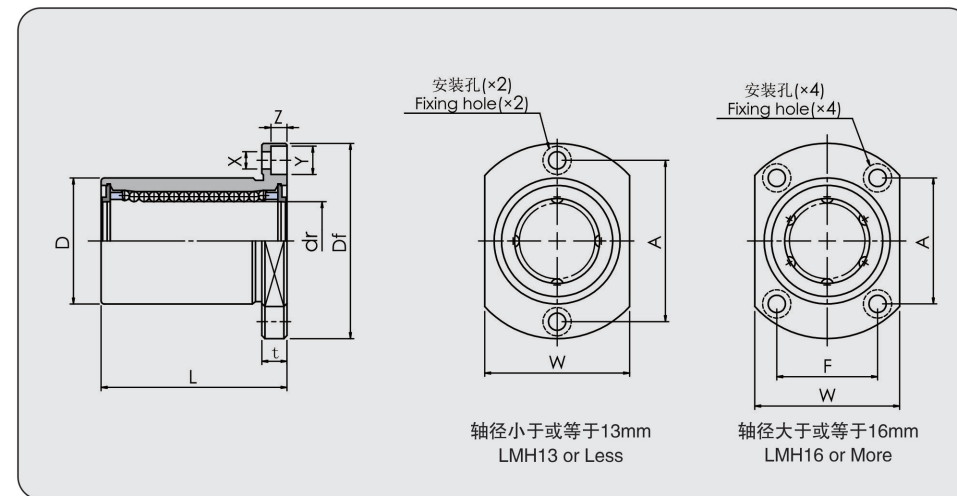

主要尺寸和公差 Major dimensions and tolerance								偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating	
法兰 Flange										动负荷 Dynamic C N	静负荷 Static Co N
Df mm	W mm	t mm	A mm	F mm	X mm	Y mm	Z mm				
20	14	3.5	14	—	2.5	4.5	2.1	8	8	88	127
26	16	5	18	—	3.5	6	3.1			167	206
28	18	5	20	—	3.5	6	3.1			206	265
32	21	5	24	—	3.5	6	3.1			274	392
40	25	6	29	—	4.5	7.5	4.1			372	549
42	27	6	32	—	4.5	7.5	4.1			510	784
43	29	6	33	—	4.5	7.5	4.1	12	12	510	784
48	34	6	31	22	4.5	7.5	4.1			774	1,180
54	38	8	36	24	5.5	9	5.1			882	1,370
62	46	8	40	32	5.5	9	5.1			980	1,570
74	51	10	49	35	6.6	11	6.1			1,570	2,740
82	60	10	55	38	6.6	11	6.1			1,670	3,140
96	70	13	64	45	9	14	8.1	20	20	2,160	4,020
116	90	13	80	56	9	14	8.1			3,820	7,940

国际单位: 1N ≈ 0.102kgf
SIUNIT: 1N ≈ 0.102kgf