

LMH...LGA 耐高温保持架

该类型尺寸是公制的，广泛应用于亚洲和其它国家。

所有型号均可根据客户要求做镀镍处理，有防锈作用。

LMH...LGA (High-temperature Resistant Retainer)

This type is a metric dimension series widely used in Asia and other countries.

All models can be done with nickle plated according to customers' requirements, with function of rust-proof.



LMH...LGA

公称轴径 Nominal shaft diameter mm	加长椭圆法兰 LMH...LGA	重量 Weight (g)	主要尺寸和公差 Major dimensions and tolerance					
			dr		D		L	
			mm	公差 Tolerance μ m	mm	公差 Tolerance μ m	mm	公差 Tolerance μ m
5	LMH5LGA	24	5	0 -10	10	0 -13	28	± 300
6	LMH6LGA	30.6	6		12		35	
8	LMH8LGA	51.6	8		15		45	
10	LMH10LGA	95	10		19	0 -16	55	
12	LMH12LGA	112.4	12		21		57	
13	LMH13LGA	137	13	0 -12	23		61	
16	LMH16LGA	216	16		28	0 -19	70	
20	LMH20LGA	297	20		32		80	
25	LMH25LGA	649	25		40		112	
30	LMH30LGA	797	30		45	0 -22	123	
35	LMH35LGA	1,148	35	0 -15	52		135	
40	LMH40LGA	1,740	40		60		151	
50	LMH50LGA	3,267	50		80		192	


LMH20 L A GA

GA 钢保持架

GA Steel retainer

A 镀镍

A Nickle plated

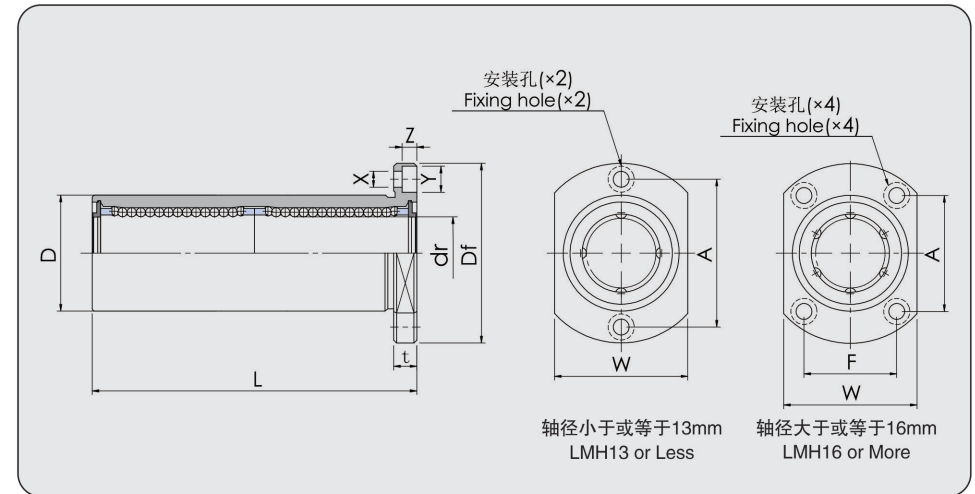

主要尺寸和公差 Major dimensions and tolerance								偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷	
法兰 Flange										Basic load rating	
Df mm	W mm	t mm	A mm	F mm	X mm	Y mm	Z mm			动负荷 Dynamic C N	静负荷 Static Co N
26	16	5	18	-	3.5	6	3.1	15	15	261	412
28	18	5	20	-	3.5	6	3.1			323	529
32	21	5	24	-	3.5	6	3.1			431	784
40	25	6	29	-	4.5	7.5	4.1			588	1,100
42	27	6	32	-	4.5	7.5	4.1			813	1,570
43	29	6	33	-	4.5	7.5	4.1			813	1,570
48	34	6	31	22	4.5	7.5	4.1			1,230	2,350
54	38	8	36	24	5.5	9	5.1			1,400	2,740
62	46	8	40	32	5.5	9	5.1	20	20	1,560	3,140
74	51	10	49	35	6.6	11	6.1			2,490	5,490
82	60	10	55	38	6.6	11	6.1	25	25	2,650	6,270
96	70	13	64	45	9	14	8.1			3,430	8,040
116	90	13	80	56	9	14	8.1			6,080	15,900

国际单位: 1N ≈ 0.102kgf
SIUNIT: 1N ≈ 0.102kgf