

LMH...UU 尼龙保持架

该类型尺寸是公制的，广泛应用于亚洲和其它国家。

所有型号均可根据客户要求做镀镍处理，有防锈作用。

LMH...UU (Resin retainer)

This type is a metric dimension series widely used in Asia and other countries.

All models can be done with nickle plated according to customers' requirements, with function of rust-proof.




LMH...UU

公称轴径 Nominal shaft diameter mm	椭圆法兰 LMH...UU	重量 Weight (g)	主要尺寸和公差 Major dimensions and tolerance					
			dr		D		L	
			mm	公差 Tolerance μ m	mm	公差 Tolerance μ m	mm	公差 Tolerance μ m
4	LMH4UU	7	4	0/-8	8	0/-11	12	± 300
5	LMH5UU	15	5	0 -9	10	0 -13	15	
6	LMH6UU	21	6		12		19	
8	LMH8UU	33	8		15		24	
10	LMH10UU	64	10		19	0 -16	29	
12	LMH12UU	68	12		21		30	
13	LMH13UU	81	13		23		32	
16	LMH16UU	112	16	0 -10	28	0 -19	37	
20	LMH20UU	167	20		32		42	
25	LMH25UU	325	25		40	0 -22	59	
30	LMH30UU	388	30		45		64	
35	LMH35UU	580	35	0 -12	52	0 -22	70	
40	LMH40UU	920	40		60		80	
50	LMH50UU	2067	50		80		100	

密封型 Seal type:

LMH20 A UU	不标	不带密封	No entry	No seals
	UU	双密封	UU	Seal on both sides
A		镀镍	A	
			Nickle plated	

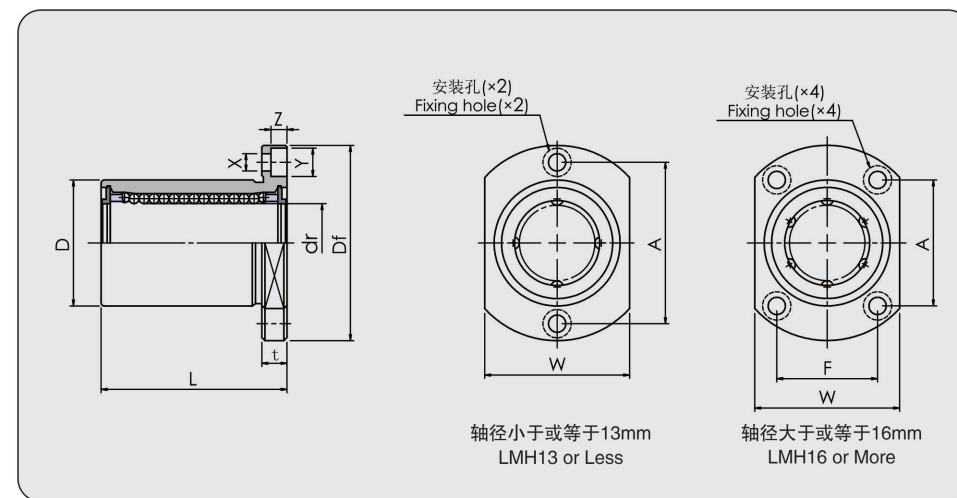

主要尺寸和公差 Major dimensions and tolerance								偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating			
法兰 Flange										动负荷 Dynamic C N	静负荷 Static Co N		
Df mm	W mm	t mm	A mm	F mm	X mm	Y mm	Z mm						
20	14	3.5	14	–	2.5	4.5	2.1	8	8	88	127		
26	16	5	18	–	3.5	6	3.1			167	206		
28	18	5	20	–	3.5	6	3.1			206	265		
32	21	5	24	–	3.5	6	3.1			274	392		
40	25	6	29	–	4.5	7.5	4.1			372	549		
42	27	6	32	–	4.5	7.5	4.1			510	784		
43	29	6	33	–	4.5	7.5	4.1	12	12	510	784		
48	34	6	31	22	4.5	7.5	4.1			774	1,180		
54	38	8	36	24	5.5	9	5.1			882	1,370		
62	46	8	40	32	5.5	9	5.1			980	1,570		
74	51	10	49	35	6.6	11	6.1			1,570	2,740		
82	60	10	55	38	6.6	11	6.1			15	15	1,670	3,140
96	70	13	64	45	9	14	8.1	20	20			2,160	4,020
116	90	13	80	56	9	14	8.1					3,820	7,940

国际单位: 1N ≈ 0.102kgf
SIUNIT: 1N ≈ 0.102kgf