

LMS...UU 尼龙保持架

该类型尺寸是公制的，广泛应用于亚洲和其它国家。

所有型号均可根据客户要求做镀镍处理，有防锈作用。


LMS...UU (Resin retainer)

This type is a metric dimension series widely used in Asia and other countries.

All models can be done with nickle plated according to customers' requirements, with function of rust-proof.



LMS...UU

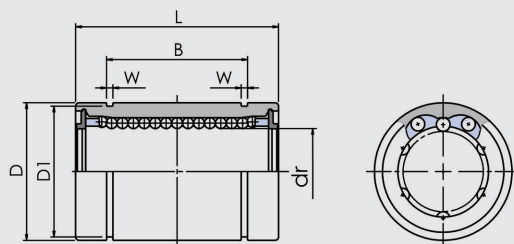

LMS...LUU 尼龙保持架

该类型尺寸是公制的，广泛应用于亚洲和其它国家。

所有型号均可根据客户要求做镀镍处理，有防锈作用。


LMS...LUU (Resin retainer)

This type is a metric dimension series widely used in Asia and other countries.

All models can be done with nickle plated according to customers' requirements, with function of rust-proof.



LMS...LUU

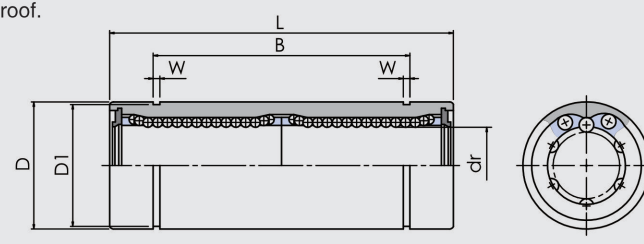

公称轴径 Nominal Shaft diameter mm	标准型 LMS...UU	钢球 列数 Ball circuit	主要尺寸和公差 Major dimensions and tolerance								偏心 Eccentricity μm	额定负荷 Basic load rating		重量 Weight (g)		
			dr		D		L		B			W	D1		动负荷 Dynamic C N	静负荷 Static Co N
			mm	公差 Tolerance μm	mm	公差 Tolerance μm	mm	公差 Tolerance μm	mm	公差 Tolerance μm						
6	LMS6UU	6	6	0	19	13.6	1.15	9.6	12	131	155	3.9				
8	LMS8UU		8	-11	24	17.6	1.15	12.4		235	277	8.7				
10	LMS10UU		10	-9	29	21.7	1.15	16.2		368	433	21.9				
12	LMS12UU		12	-13	30	23.1	1.35	18		381	449	24				
16	LMS16UU		16	26	37	26	1.35	24.9		608	716	60				

密封型 Seal type:
LMS16 A UU

不标	不带密封	No entry	No seals
U	单密封	U	Seal on one side
UU	双密封	UU	Seal on both sides

A 镀镍

A Nickle plated

国际单位: 1N ≈ 0.102kgf
SIUNIT: 1N ≈ 0.102kgf

公称轴径 Nominal Shaft diameter mm	加长型 LMS...LUU	钢球 列数 Ball circuit	主要尺寸和公差 Major dimensions and tolerance								偏心 Eccentricity μm	额定负荷		重量 Weight (g)		
			dr		D		L		B			W	D1		Basic load rating	
			mm	公差 Tolerance μm	mm	公差 Tolerance μm	mm	公差 Tolerance μm	mm	公差 Tolerance μm		mm	mm		动负荷 Dynamic C N	静负荷 Static Co N
6	LMS6LUU	6	6		10	0	35		27.1		1.15	9.6	15	206	309	7.3
8	LMS8LUU		8		13	-13	45		35.1		1.15	12.4		383	555	16.9
10	LMS10LUU		10	0 -10	17		55	0 -300	43.7	0 -300	1.15	16.2		585	867	42
12	LMS12LUU		12		19	0 -16	57		46.1		1.35	18		608	899	47
16	LMS16LUU		16		26		70		52.5		1.35	24.9		965	1431	117

密封型 Seal type:
LMS16 L A UU

不标	不带密封	No entry	No seals
U	单密封	U	Seal on one side
UU	双密封	UU	Seal on both sides

A 镀镍

A Nickle plated

国际单位: 1N ≈ 0.102kgf
SIUNIT: 1N ≈ 0.102kgf