

LMT...UU 尼龙保持架

该类型尺寸是公制的，广泛应用于亚洲和其它国家。

所有型号均可根据客户要求做镀镍处理，有防锈作用。


LMT...UU (Resin retainer)

This type is a metric dimension series widely used in Asia and other countries.

All models can be done with nickle plated according to customers' requirements, with function of rust-proof.



LMT...UU

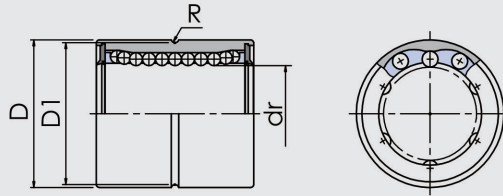

LMT...LUU 尼龙保持架

该类型尺寸是公制的，广泛应用于亚洲和其它国家。

所有型号均可根据客户要求做镀镍处理，有防锈作用。


LMT...LUU (Resin retainer)

This type is a metric dimension series widely used in Asia and other countries.

All models can be done with nickle plated according to customers' requirements, with function of rust-proof.



LMT...LUU

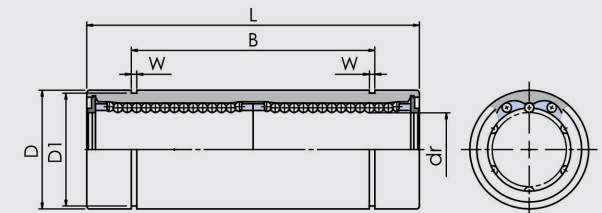

公称轴径 Nominal Shaft diameter mm	标准型 LMT...UU	钢球 列数 Ball circuit	主要尺寸和公差 Major dimensions and tolerance							偏心 Eccentricity μm	额定负荷 Basic load rating		重量 Weight (g)	
			dr		D		L		R mm		D1 mm	动负荷 Dynamic C N		静负荷 Static Co N
			mm	公差 Tolerance μm	mm	公差 Tolerance μm	mm	公差 Tolerance μm						
6	LMT6UU	4	6		12	0	16		1	11.4	12	113	155	6.5
8	LMT8UU		8		15	-11	20		1	14.4		155	226	11.4
10	LMT10UU		10	0	19		25	0	1.2	18.2		254	359	22.6
12	LMT12UU		12	-9	21	0	25	-200	1.2	20.2		317	407	24.5
13	LMT13UU	5	13		23	-13	25		1.2	22.2	15	320	413	33
16	LMT16UU		16		28		30		1.5	27		582	724	63
20	LMT20UU		20	0	32	0	35		1.5	31		777	1034	74
25	LMT25UU		25	-10	40	-16	45	0	1.5	39		862.5	1534	166
30	LMT30UU	6	30		45		50	-300	1.5	44		1220	1987	189

密封型 Seal type:
LMT20 A UU

不标	不带密封	No entry	No seals
U	单密封	U	Seal on one side
UU	双密封	UU	Seal on both sides

A

镀镍

A

Nickle plated

国际单位: 1N≈0.102kgf
SIUNIT: 1N≈0.102kgf

公称轴径 Nominal Shaft diameter mm	标准型 LMT...LUU	钢球 列数 Ball circuit	主要尺寸和公差 Major Dimensions and Tolerance										偏心 Eccentricity μm	额定负荷 Basic load rating			重量 Weight (g)
			dr		D		L		B		W mm	D1 mm		动负荷 Dynamic C N	静负荷 Static Co N		
			mm	公差 Tolerance μm	mm	无表面处理 No surface treatment μm	有表面处理 Surface treatment μm	mm	公差 Tolerance μm	mm						公差 Tolerance μm	
6	LMT6LUU	4	6		12	0	0	29		22.2		1.1	11.5	15	226	310	12.1
8	LMT8LUU		8		15	-13	-18	37		27.2		1.1	14.3		310	452	21.5
10	LMT10LUU		10	0	19			47	0	32.6	0	1.3	18		508	718	43
12	LMT12LUU		12	-10	21	0	0	47	-300	32.6	-300	1.3	20		634	814	45.6
13	LMT13LUU	5	13		23	-16	-21	47		32.6		1.3	22	20	640	826	61
16	LMT16LUU		16		28			56		38.2		1.6	27		1164	1448	119
20	LMT20LUU		20	0	32	0	0	65	0	43.2	0	1.6	30.5		1554	2068	140
25	LMT25LUU		25	-12	40	0	0	83	0	58.7	0	1.85	38		1725	3068	309
30	LMT30LUU	6	30		45		-25	90	-400	75	-400	1.85	43		2440	3974	376

密封型 Seal type:
LMT20 L A UU

不标	不带密封	No entry	No seals
U	单密封	U	Seal on one side
UU	双密封	UU	Seal on both sides

A

镀镍

A

Nickle plated

国际单位: 1N≈0.102kgf
SIUNIT: 1N≈0.102kgf