

LM...UU-MX 尼龙保持架

该类型尺寸是公制的，广泛应用于亚洲和其它国家。

所有型号均可根据客户要求做镀镍处理，有防锈作用。


LM...UU-MX (Resin retainer)

This type is a metric dimension series widely used in Asia and other countries.

All models can be done with nickle plated according to customers' requirements, with function of rust-proof.



LM...UU-MX

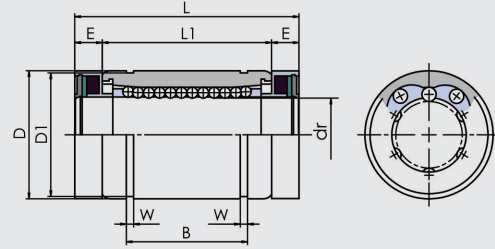

LM...LUU-MX 尼龙保持架

该类型尺寸是公制的，广泛应用于亚洲和其它国家。

所有型号均可根据客户要求做镀镍处理，有防锈作用。


LM...LUU-MX (Resin retainer)

This type is a metric dimension series widely used in Asia and other countries.

All models can be done with nickle plated according to customers' requirements, with function of rust-proof.



LM...LUU-MX

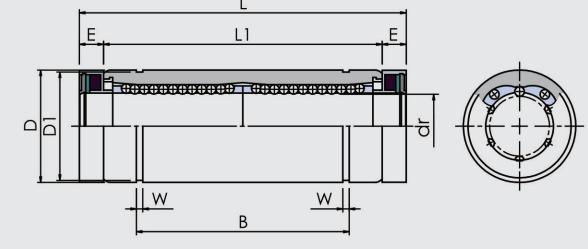

公称轴径 Nominal Shaft diameter mm	标准型 LM...UU-MX	钢球 列数 Ball circuit	主要尺寸和公差 Major dimensions and tolerance										偏心 Eccentricity μm	额定负荷 Basic load rating		重量 Weight (g)	
			dr		D		L mm	L1 mm	E mm	B		W mm		D1 mm	动负荷 Dynamic C N		静负荷 Static Co N
			mm	公差 Tolerance μm	mm	公差 Tolerance μm				mm	公差 Tolerance μm						
10	LM10UU-MX	4	10		19		39	29	5	22		1.3	18	12	372	549	35
12	LM12UU-MX		12	0 -9	21	0 -13	41	30	5.5	23	0	1.3	20		510	784	45
16	LM16UU-MX		16		28		49	37	6	26.5	-200	1.6	27		774	1180	80
20	LM20UU-MX	5	20		32		56	42	7	30.5		1.6	30.5	15	882	1370	109
25	LM25UU-MX		25	0 -10	40	0 -16	77	59	9	41		1.85	38		980	1570	255
30	LM30UU-MX		30		45		84	64	10	44.5		1.85	43		1570	2740	286
35	LM35UU-MX	6	35		52		92	70	11	49.5	0 -300	2.1	49	20	1670	3140	453
40	LM40UU-MX		40	0 -12	60	0 -19	104	80	12	60.5		2.1	57		2160	4020	687
50	LM50UU-MX		50		80		128	100	14	74		2.6	76.5		3820	7940	1763

密封型 Seal type:

LM20 A UU-MX

UU 双密封

UU Seal on both sides

A 镀镍

A Nickle plated

国际单位: 1N≈0.102kgf

SIUNIT: 1N≈0.102kgf

公称轴径 Nominal Shaft diameter mm	加长型 LM...LUU-MX	钢球 列数 Ball circuit	主要尺寸和公差 Major dimensions and tolerance										偏心 Eccentricity μm	额定负荷 Basic load rating		重量 Weight (g)	
			dr		D		L	L1	E	B		W		D1	动负荷 Dynamic C N		静负荷 Static Co N
			mm	公差 Tolerance μm	mm	公差 Tolerance μm				mm	公差 Tolerance μm						
10	LM10LUU-MX	4	10		19		65	55	5	44		1.3	18	15	588	1100	66
12	LM12LUU-MX		12	0 -10	21	0 -16	68	57	5.5	46	0	1.3	20		813	1570	84
16	LM16LUU-MX		16		28		82	70	6	53	-300	1.6	27		1230	2350	152
20	LM20LUU-MX	5	20		32		94	80	7	61		1.6	30.5	20	1400	2740	191
25	LM25LUU-MX		25	0 -12	40	0 -19	130	112	9	82		1.85	38		1560	3140	459
30	LM30LUU-MX		30		45		143	123	10	89	0	1.85	43		2490	5490	504
35	LM35LUU-MX	6	35		52		157	135	11	99	0 -400	2.1	49	25	2650	6270	823
40	LM40LUU-MX		40	0 -15	60	0 -22	175	151	12	121		2.1	57		3430	8040	1203
50	LM50LUU-MX		50		80		220	192	14	148		2.6	76.5		6080	15900	3163

密封型 Seal type:

LM20 L A UU-MX

UU 双密封

UU Seal on both sides

A 镀镍

A Nickle plated

国际单位: 1N≈0.102kgf

SIUNIT: 1N≈0.102kgf