

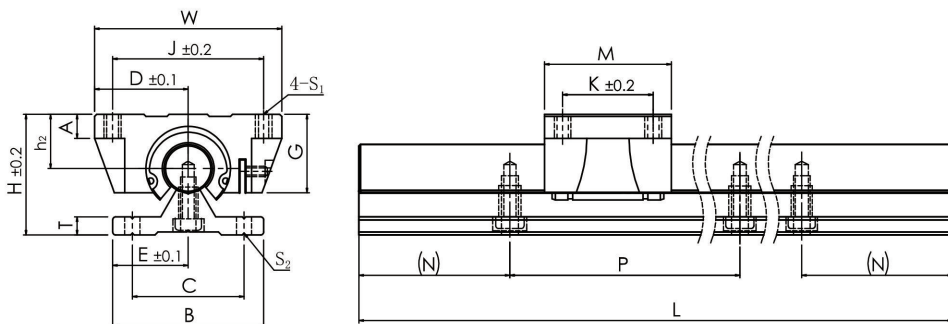


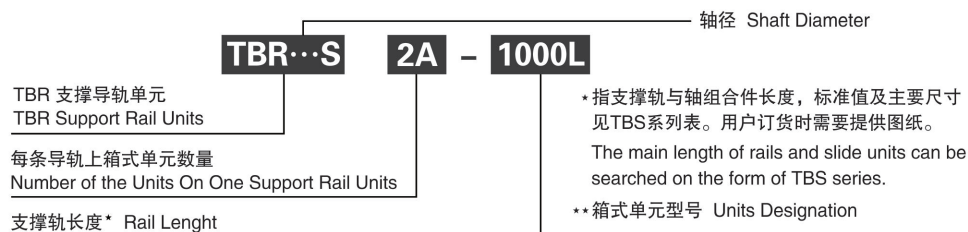


型号 Model	所用 箱式单元** The slide units used**	轴径 Shaft diameter mm	额定负荷 Basic load rating		重量 Weight (g)		尺寸 Dimensions (mm)			
			动负荷 Dynamic C N	静负荷 Static Co N	箱式单元 Slide units (g)	导轨 Rails (g/m)	D	h ₂	H	E
TBR16SA	TBR16UU	16	392	490	180	2,450	31	18	40	25
TBR20SA	TBR20UU	20	784	1,176	300	3,600	34	21	50	27.5
TBR25SA	TBR25UU	25	1,568	2,352	600	5,600	41	28	60	32.5
TBR30SA	TBR30UU	30	1,764	2,940	900	8,000	45.5	33.5	70	37.5

型号 Model	尺寸 Dimensions (mm)												
	W	G	A	B	T	M	S ₁	J	K	S ₂	C	N	P
TBR16SA	62	26	8	50	6	42	M5	50	30	φ5.5	37	20	150
TBR20SA	68	31	10	55	8	51	M6	54	37	φ5.5	40	20	150
TBR25SA	82	41	12	65	10	65	M8	65	50	φ6.6	45	25	200
TBR30SA	91	48	12	75	12	75	M8	75	60	φ6.6	55	25	200

轴支座 Shaft Support

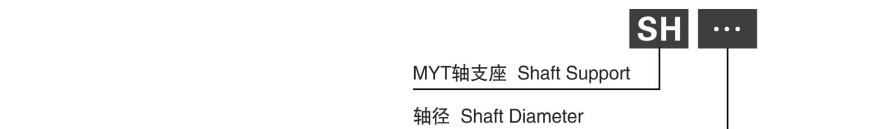

SH (SK)

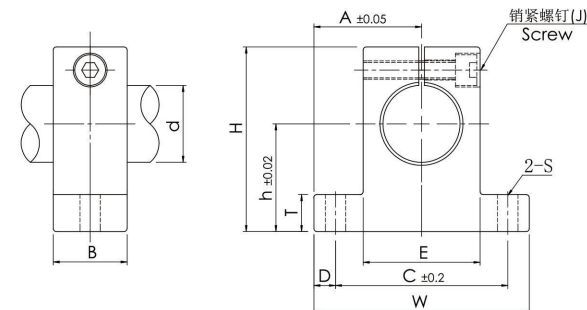

型号 Model	轴径 Shaft diameter mm	尺寸 Dimensions (mm)											重量 Weight (g)
		h	A	W	H	T	E	D	C	B	S	J	
SH6	φ6	20	21	42	32.8	6	18	5	32	14	φ5.5	M4	24
SH8	φ8	20	21	42	32.8	6	18	5	32	14	φ5.5	M4	24
SH10	φ10	20	21	42	32.8	6	18	5	32	14	φ5.5	M4	24
SH12	φ12	23	21	42	37.5	6	20	5	32	14	φ5.5	M4	30
SH13	φ13	23	21	42	37.5	6	20	5	32	14	φ5.5	M4	30
SH16	φ16	27	24	48	44	8	25	5	38	16	φ5.5	M4	40
SH20	φ20	31	30	60	51	10	30	7.5	45	20	φ6.6	M5	70
SH25	φ25	35	35	70	60	12	38	7	56	24	φ6.6	M6	130
SH30	φ30	42	42	84	70	12	44	10	64	28	φ9	M6	180
SH35	φ35	50	49	98	82	15	50	12	74	32	φ11	M8	270
SH40	φ40	60	57	114	96	15	60	12	90	36	φ11	M8	420
SH50	φ50	70	63	126	120	18	74	13	100	40	φ14	M12	750
SH60	φ60	80	74	148	136	18	90	14	120	45	φ14	M12	1,100