

SSLMF(K)···LDD 不锈钢直线轴承

该类型尺寸是公制的，广泛用于亚洲和其他国家

SSLMF(K)···LDD (Stainless steel linear bearing)


This type is a metric dimension series widely Used in Asia and other countries



SSLMF···LDD



SSLMK···LDD

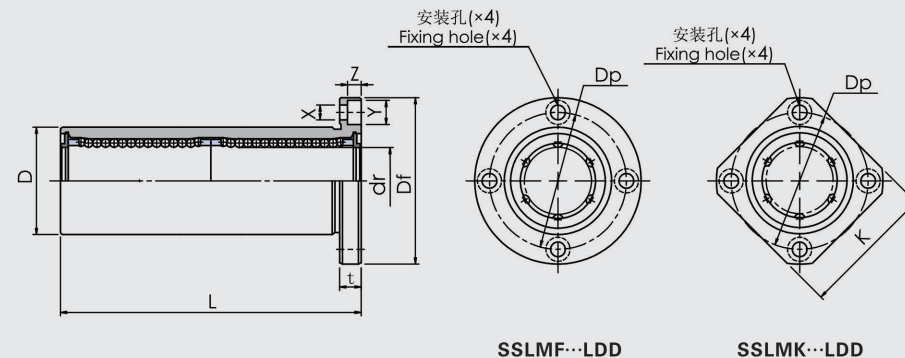

SSLMF···LDD

SSLMK···LDD

公称轴径 Nominal Shaft diameter mm	加长圆法兰 SSLMF···LDD	重量 Weight (g)	加长方法兰 SSLMK···LDD	重量 Weight (g)	主要尺寸和公差 Major dimensions and tolerance					
					dr		D		L	
					mm	公差 Tolerance μm	mm	公差 Tolerance μm	mm	公差 Tolerance μm
5	SSLMF5LDD	20.9	SSLMK5LDD	16.8	5	0 -10	10	0 -13	28	± 300
6	SSLMF6LDD	29.9	SSLMK6LDD	24.4	6		12		35	
8	SSLMF8LDD	46	SSLMK8LDD	38.6	8		15		45	
10	SSLMF10LDD	86.2	SSLMK10LDD	69.4	10		19		55	
12	SSLMF12LDD	94.1	SSLMK12LDD	76.9	12		21		57	
13	SSLMF13LDD	118.3	SSLMK13LDD	103.4	13	0 -12	23	-16	61	
16	SSLMF16LDD	191.8	SSLMK16LDD	170.5	16		28		70	
20	SSLMF20LDD	242.5	SSLMK20LDD	208.1	20		32		80	
25	SSLMF25LDD	500.9	SSLMK25LDD	463.9	25		40		112	
30	SSLMF30LDD	629.7	SSLMK30LDD	552.1	30		45		123	
35	SSLMF35LDD	917.5	SSLMK35LDD	820.1	35	0 -15	52	0 -22	135	
40	SSLMF40LDD	1464.5	SSLMK40LDD	1291.8	40		60		151	
50	SSLMF50LDD	3470.1	SSLMK50LDD	3237.8	50		80		192	
60	SSLMF60LDD	4139.2	SSLMK60LDD	3703.6	60		90		209	

SSLMF20 L GS DD -S	不标	钢球材质:GCr15	Non-standard	Material GCr15 steel ball
	S	钢球材质:95Cr18	S	Material stainless steel ball
	不标	不锈钢挡圈	Non-standard	Stainless steel retaining ring
	DD	耐腐蚀双密封	DD	Corrosion resistant, double seal
	不标	保持架材质:PA66	Non-standard	Material of cage PA66
	GS	保持架材质:不锈钢	GS	Material stainless steel cage

主要尺寸和公差 Major dimensions and tolerance							偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating	
法兰 Flange									动负荷 Dynamic C N	静负荷 Static Co N
Df mm	K mm	t mm	Dp mm	X mm	Y mm	Z mm				
26	21	5	18	3.5	6	3.1	15	15	261	412
28	22	5	20	3.5	6	3.1			323	529
32	25	5	24	3.5	6	3.1			431	784
40	30	6	29	4.5	7.5	4.1			588	1,100
42	32	6	32	4.5	7.5	4.1			813	1,570
43	34	6	33	4.5	7.5	4.1	20	20	813	1,570
48	37	6	38	4.5	7.5	4.1			1,230	2,350
54	42	8	43	5.5	9	5.1			1,400	2,740
62	50	8	51	5.5	9	5.1			1,560	3,140
74	58	10	60	6.6	11	6.1			2,490	5,490
82	64	10	67	6.6	11	6.1	25	25	2,650	6,270
96	75	13	78	9	14	8.1			3,430	8,040
116	92	13	98	9	14	8.1			6,080	15,900
134	106	18	112	11	17	11.1			7,550	20,000