

SSLMHP...LDD 不锈钢直线轴承


该类型尺寸是公制的，广泛用于亚洲和其他国家

SSLMHP...LDD (Stainless steel linear bearing)

This type is a metric dimension series widely Used in Asia and other countries



SSLMHP...LDD

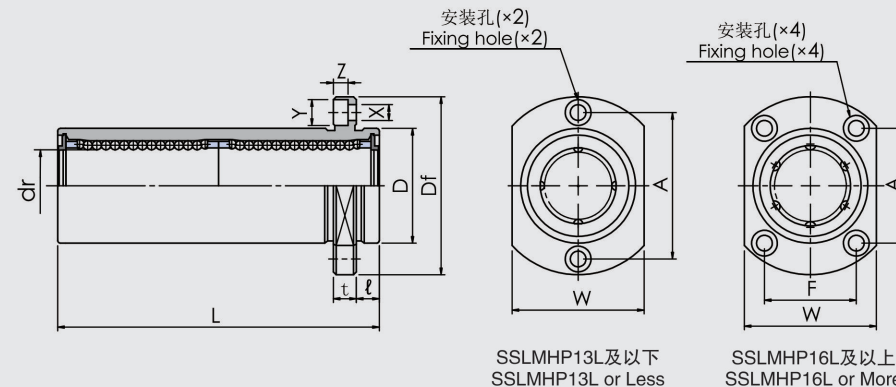

公称轴径 Nominal shaft diameter mm	加长导向椭圆法兰 SSLMHP...LDD	重量 Weight (g)	主要尺寸和公差 Major dimensions and tolerance					
			dr		D		L	
			mm	公差 Tolerance μm	mm	公差 Tolerance μm	mm	公差 Tolerance μm
6	SSLMHP6LDD	25.9	6	0 -10	12	0	35	± 300
8	SSLMHP8LDD	40.6	8		15	-13	45	
10	SSLMHP10LDD	74.5	10		19		55	
12	SSLMHP12LDD	81.9	12		21	0	57	
13	SSLMHP13LDD	107.3	13		23	-16	61	
16	SSLMHP16LDD	176.7	16	0 -12	28		70	
20	SSLMHP20LDD	216.4	20		32	0	80	
25	SSLMHP25LDD	472.7	25		40	-19	112	
30	SSLMHP30LDD	563.9	30		45		123	
35	SSLMHP35LDD	852.2	35		52	0	135	
40	SSLMHP40LDD	1346.6	40	0 -15	60	-22	151	

SSLMHP20 L GS DD -S	不标	钢球材质:GCr15	Non-standard	Material GCr15 steel ball
	S	钢球材质:95Cr18	S	Material stainless steel ball
	不标	不锈钢挡圈	Non-standard	Stainless steel retaining ring
	DD	耐腐蚀双密封	DD	Corrosion resistant, double seal
	不标	保持架材质:PA66	Non-standard	Material of cage PA66
	GS	保持架材质:不锈钢	GS	Material stainless steel cage

主要尺寸和公差 Major dimensions and tolerance									偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating					
法兰 Flange											动负荷 Dynamic Co N	静负荷 Static Co N				
ℓ mm	Df mm	W mm	t mm	A mm	F mm	X mm	Y mm	Z mm	15	15	323	529				
5	28	18	5	20	—	3.5	6	3.1								
5	32	21	5	24	—	3.5	6	3.1					20	20	1,400	2,740
6	40	25	6	29	—	4.5	7.5	4.1								
6	42	27	6	32	—	4.5	7.5	4.1								
6	43	29	6	33	—	4.5	7.5	4.1								
6	48	34	6	31	22	4.5	7.5	4.1	25	25	2,650	8,040				
8	54	38	8	36	24	5.5	9	5.1								
8	62	46	8	40	32	5.5	9	5.1								
10	74	51	10	49	35	6.6	11	6.1								
10	82	60	10	55	38	6.6	11	6.1								
13	96	70	13	64	45	9	14	8.1								