
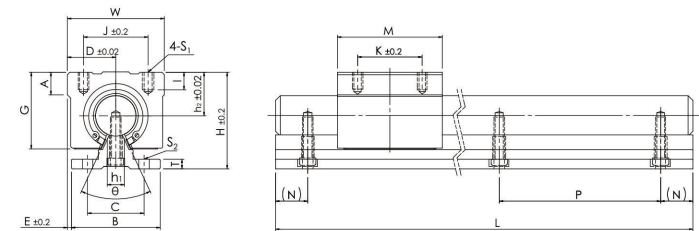


型号 Model	轴径 Shaft diameter mm	尺寸 Dimensions (mm)												重量 Weight (g)
		E	h	B	H	T	X	C	θ	S ₁	a ₁	a ₂	d ₁	
TBS16	16	25	22	50	14.84	6	8	37	60 ^o	5.5	6	9.5	5.5	2,660
TBS20	20	27.5	29	55	19.64	8	8	40	50 ^o	5.5	6.5	11	6.6	4,230
TBS25	25	32.5	32	65	20	10	8	45	50 ^o	6.6	6.5	11	6.6	5,850
TBS30	30	37.5	36.5	75	22.28	12	10.3	55	50 ^o	6.6	8.5	14	9	8,280

支撑轨标准长度和主要尺寸
Support Rail Standard Length and Dimensions

型号 Model	TBS16	TBS20	TBS25	TBS30
Standard Length	190 340 490	190 340 490	250 450 650	250 450 650
L	∴ 1,390	∴ 1,390	∴ 1,850	∴ 1,850
N	20	20	25	25
P	150	150	200	200
Max. Length	4,000	4,000	4,000	4,000

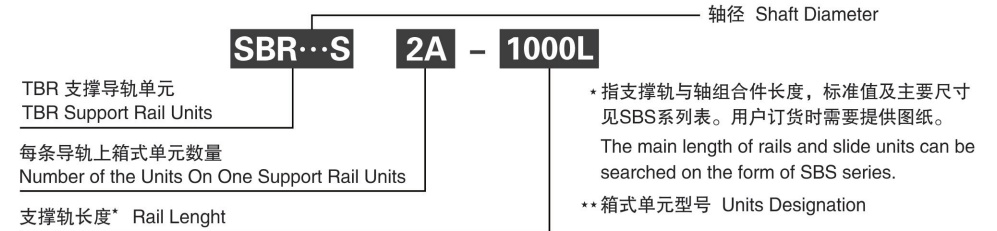

型号 Model	所用 箱式单元** The slide units used**	轴径 Shaft diameter mm	额定负荷 Basic load rating		重量 Weight (g)		尺寸 Dimensions (mm)				
			动负荷 Dynamic Co N	静负荷 Static Co N	箱式单元 Slide units(g)	导轨 Rails (g/m)	D	h ₂	H	E	θ
SBR10SA	SBR10UU	φ10	380	560	65	1,260	18	15	33	2	80°
SBR12SA	SBR12UU	φ12	510	780	100	1,880	20	17	37.4	3	80°
SBR16SA	SBR16UU	φ16	770	1,170	150	2,560	22.5	20	45	2.5	80°
SBR20SA	SBR20UU	φ20	860	1,370	200	3,500	24	23	50	1.5	60°
SBR25SA	SBR25UU	φ25	980	1,560	450	5,300	30	27	60	2.5	50°
SBR30SA	SBR30UU	φ30	1,560	2,740	630	7,380	35	33	70	5	50°
SBR35SA	SBR35UU	φ35	1,660	3,130	920	10,050	40	37	80	7.5	50°
SBR40SA	SBR40UU	φ40	2,150	4,010	1,330	13,100	45	42	90	7.5	50°
SBR50SA	SBR50UU	φ50	3,820	7,930	3,000	20,650	60	53	115	12.5	50°

型号 Model	尺寸 Dimensions (mm)													
	W	G	A	B	T	M	S ₁ x I	J	K	S ₂	C	N	P	h ₁
SBR10SA	36	24	7	32	4	32	M5x10	25	20	φ4.5	22	15	120	6.8
SBR12SA	40	27	8	34	4.5	39	M5x10	28	26	φ4.5	25	15	120	8
SBR16SA	45	33	9	40	5	45	M5x12	32	30	φ5.5	30	20	150	11
SBR20SA	48	39	11	45	5	50	M6x12	35	35	φ5.5	30	20	150	11
SBR25SA	60	47	14	55	6	65	M6x12	40	40	φ6.6	35	25	200	12
SBR30SA	70	56	15	60	7	70	M8x18	50	50	φ6.6	40	25	200	15
SBR35SA	80	63	18	65	8	80	M8x18	55	55	φ9.0	45	30	200	17
SBR40SA	90	72	20	75	9	90	M10x20	65	65	φ9.0	55	30	200	20
SBR50SA	120	92	25	95	11	110	M10x20	94	80	φ11	70	35	200	25

型号 Model	所用 箱式单元** The slide units used**	尺寸 Dimensions (mm)								配合直线轴承 Liner bearing			重量 Weight (g)
										型号 Model	额定负荷 Basic load rating		
											动负荷 Dynamic C N	静负荷 Static Co N	
		h ₂	D	W	M	G	K	S ₁	I				
SBR12LSA	SBR12LUU	17	20	40	70	27	46	M5	10	2xLM12UUOP	1,020	1,568	170
SBR16LSA	SBR16LUU	20	22.5	45	85	33	60	M5	12	2xLM16UUOP	1,548	2,360	300
SBR20LSA	SBR20LUU	23	24	48	96	39	70	M6	12	2xLM20UUOP	1,764	2,740	400
SBR25LSA	SBR25LUU	27	30	60	130	47	100	M6	12	2xLM25UUOP	1,960	3,140	900
SBR30LSA	SBR30LUU	33	35	70	140	56	110	M8	18	2xLM30UUOP	3,140	5,480	1,260
SBR35LSA	SBR35LUU	37	40	80	155	63	130	M8	18	2xLM35UUOP	3,340	6,260	1,840
SBR40LSA	SBR40LUU	42	45	90	175	72	140	M10	20	2xLM40UUOP	4,320	8,040	2,660
SBR50LSA	SBR50LUU	53	60	120	215	92	175	M10	20	2xLM50UUOP	7,640	15,880	5,952