

SSLMH...DD 不锈钢直线轴承

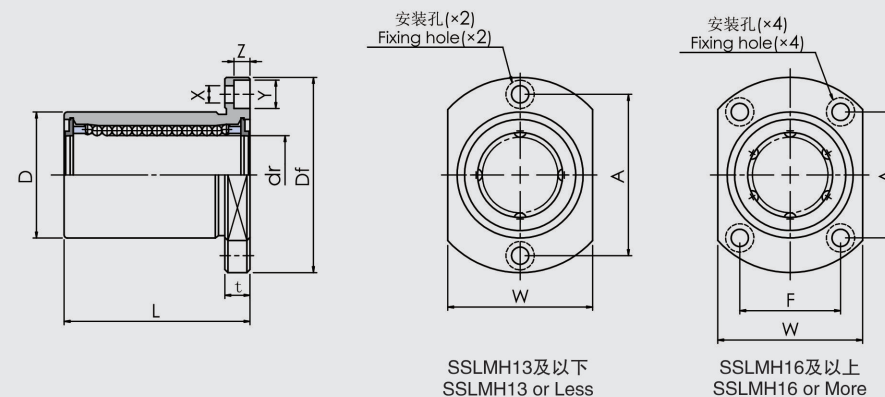
该类型尺寸是公制的，广泛用于亚洲和其他国家

SSLMH...DD (Stainless steel linear bearing)

This type is a metric dimension series widely Used in Asia and other countries



SSLMH...DD

SSLMH13及以下
SSLMH13 or LessSSLMH16及以上
SSLMH16 or More

公称轴径 Nominal shaft diameter mm	椭圆法兰 SSLMH...DD	重量 Weight (g)	主要尺寸和公差 Major dimensions and tolerance					
			dr		D		L	
			mm	公差 Tolerance μm	mm	公差 Tolerance μm	mm	公差 Tolerance μm
4	SSLMH4	6.8	4	0/-8	8	0/-11	12	± 300
5	SSLMH5DD	13.6	5	0 -9	10	0 -13	15	
6	SSLMH6DD	19.1	6		12		19	
8	SSLMH8DD	28.2	8		15		24	
10	SSLMH10DD	50.9	10		19	0 -16	29	
12	SSLMH12DD	56.1	12		21		30	
13	SSLMH13DD	69.8	13	0 -10	23		32	
16	SSLMH16DD	107.3	16		28	0 -19	37	
20	SSLMH20DD	136.5	20		32		42	
25	SSLMH25DD	276.2	25		40		59	
30	SSLMH30DD	346.5	30		45	0 -22	64	
35	SSLMH35DD	509.8	35	0 -12	52		70	
40	SSLMH40DD	831.6	40		60		80	

SSLMH20 GS DD -S	不标	钢球材质:GCr15	Non-standard	Material GCr15 steel ball
		钢球材质:95Cr18	S	Material stainless steel ball
	不标	不锈钢挡圈	Non-standard	Stainless steel retaining ring
		耐腐蚀双密封	DD	Corrosion resistant, double seal
	不标	保持架材质:PA66	Non-standard	Material of cage PA66
		保持架材质:不锈钢	GS	Material stainless steel cage

主要尺寸和公差 Major dimensions and tolerance								偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating	
法兰 Flange										动负荷 Dynamic C N	静负荷 Static Co N
Df mm	W mm	t mm	A mm	F mm	X mm	Y mm	Z mm				
20	14	3.5	14	—	2.5	4.5	2.1	8	8	88	127
26	16	5	18	—	3.5	6	3.1			167	206
28	18	5	20	—	3.5	6	3.1			206	265
32	21	5	24	—	3.5	6	3.1			274	392
40	25	6	29	—	4.5	7.5	4.1			372	549
42	27	6	32	—	4.5	7.5	4.1			510	784
43	29	6	33	—	4.5	7.5	4.1	12	12	510	784
48	34	6	31	22	4.5	7.5	4.1			774	1,180
54	38	8	36	24	5.5	9	5.1			882	1,370
62	46	8	40	32	5.5	9	5.1			980	1,570
74	51	10	49	35	6.6	11	6.1			1,570	2,740
82	60	10	55	38	6.6	11	6.1			1,670	3,140
96	70	13	64	45	9	14	8.1	20	20	2,160	4,020