

SSLMH...LDD 不锈钢直线轴承


该类型尺寸是公制的，广泛用于亚洲和其他国家

SSLMH...LDD (Stainless steel linear bearing)

This type is a metric dimension series widely Used in Asia and other countries



SSLMH...LDD

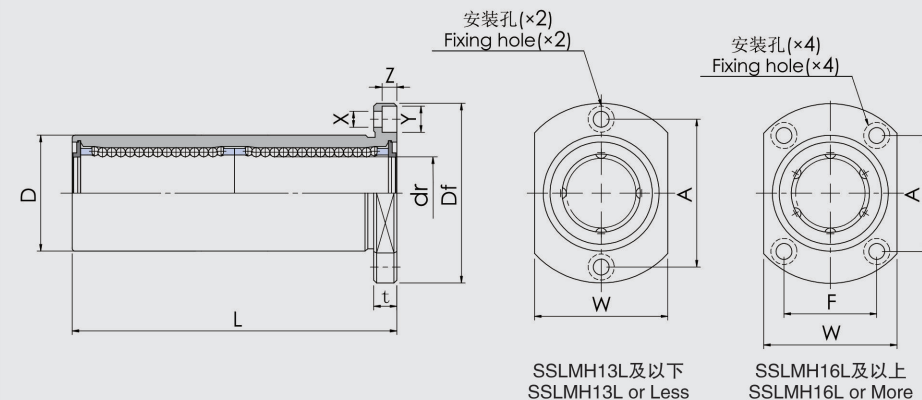

公称轴径 Nominal shaft diameter mm	加长椭圆法兰 SSLMH...LDD	重量 Weight (g)	主要尺寸和公差 Major dimensions and tolerance					
			dr		D		L	
			mm	公差 Tolerance μm	mm	公差 Tolerance μm	mm	公差 Tolerance μm
5	SSLMH5LDD	17	5	0 -10	10	0 -13	28	± 300
6	SSLMH6LDD	25.9	6		12		35	
8	SSLMH8LDD	40.6	8		15		45	
10	SSLMH10LDD	74.5	10		19	0 -16	55	
12	SSLMH12LDD	81.9	12		21		57	
13	SSLMH13LDD	107.3	13		23		61	
16	SSLMH16LDD	176.7	16	0 -12	28	0 -19	70	
20	SSLMH20LDD	216.4	20		32		80	
25	SSLMH25LDD	472.7	25		40	0 -22	112	
30	SSLMH30LDD	563.9	30		45		123	
35	SSLMH35LDD	852.2	35	0 -15	52	0 -22	135	
40	SSLMH40LDD	1346.6	40		60		151	

SSLMH20 L GS DD -S	不标	钢球材质:GCr15	Non-standard	Material GCr15 steel ball
	S	钢球材质:95Cr18	S	Material stainless steel ball
	不标	不锈钢挡圈	Non-standard	Stainless steel retaining ring
	DD	耐腐蚀双密封	DD	Corrosion resistant, double seal
	不标	保持架材质:PA66	Non-standard	Material of cage PA66
	GS	保持架材质:不锈钢	GS	Material stainless steel cage

主要尺寸和公差 Major dimensions and tolerance								偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷	
法兰 Flange										Basic load rating	
Df mm	W mm	t mm	A mm	F mm	X mm	Y mm	Z mm			动负荷 Dynamic C N	静负荷 Static Co N
26	16	5	18	—	3.5	6	3.1	15	15	261	412
28	18	5	20	—	3.5	6	3.1			323	529
32	21	5	24	—	3.5	6	3.1			431	784
40	25	6	29	—	4.5	7.5	4.1			588	1,100
42	27	6	32	—	4.5	7.5	4.1			813	1,570
43	29	6	33	—	4.5	7.5	4.1			813	1,570
48	34	6	31	22	4.5	7.5	4.1	20	20	1,230	2,350
54	38	8	36	24	5.5	9	5.1			1,400	2,740
62	46	8	40	32	5.5	9	5.1			1,560	3,140
74	51	10	49	35	6.6	11	6.1			2,490	5,490
82	60	10	55	38	6.6	11	6.1	25	25	2,650	6,270
96	70	13	64	45	9	14	8.1			3,430	8,040