

SSLMEF(K)···LDD 不锈钢直线轴承

该类型尺寸是公制的，广泛应用于欧洲。

SSLMEF(K)···LDD (Stainless steel linear bearing)

This type is a metric dimension series generally used in Europe.




SSLMEF···LDD



SSLMEK···LDD

公称轴径 Nominal Shaft diameter mm	加长圆法兰 SSLMEF···LDD	重量 Weight (g)	加长方法兰 SSLMEK···LDD	重量 Weight (g)	主要尺寸和公差 Major dimensions and tolerance					
					dr		D		L	
					mm	公差 Tolerance μ m	mm	公差 Tolerance μ m	mm	公差 Tolerance μ m
8	SSLMEF8LDD	59	SSLMEK8LDD	51	8	+9	16	0/-13	46	±300
12	SSLMEF12LDD	110	SSLMEK12LDD	90	12	-1	22	0	61	
16	SSLMEF16LDD	160	SSLMEK16LDD	135	16	+11	26	-16	68	
20	SSLMEF20LDD	260	SSLMEK20LDD	225	20	-1	32	0	80	
25	SSLMEF25LDD	540	SSLMEK25LDD	500	25	+13	40	-19	112	
30	SSLMEF30LDD	815	SSLMEK30LDD	720	30	-2	47	0	123	
40	SSLMEF40LDD	1,805	SSLMEK40LDD	1,600	40	+16 -4	62	0	151	
50	SSLMEF50LDD	2,820	SSLMEK50LDD	2,620	50		75	-22	192	
60	SSLMEF60LDD	4,920	SSLMEK60LDD	4,480	60		90	0/-25	209	

SSLMEF20 L GS DD -S	不标	钢球材质:GCr15	Non-standard	Material GCr15 steel ball
		S 钢球材质:95Cr18	S	Material stainless steel ball
	不标	不锈钢挡圈	Non-standard	Stainless steel retaining ring
		DD 耐腐蚀双密封	DD	Corrosion resistant, double seal
	不标	保持架材质:PA66	Non-standard	Material of cage PA66
		GS 保持架材质:不锈钢	GS	Material stainless steel cage

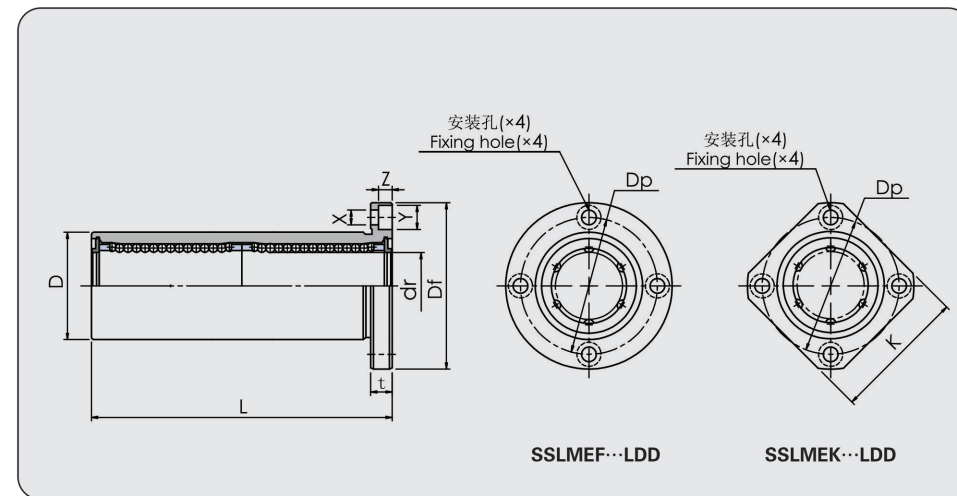

主要尺寸和公差 Major dimensions and tolerance							偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating	
法兰 Flange									动负荷 Dynamic C N	静负荷 Static Co N
Df mm	K mm	t mm	Dp mm	X mm	Y mm	Z mm				
32	25	5	24	3.5	6	3.1	15	15	421	804
42	32	6	32	4.5	7.5	4.1			813	1,570
46	35	6	36	4.5	7.5	4.1			912	1,780
54	42	8	43	5.5	9	5.1	17	17	1,370	2,740
62	50	8	51	5.5	9	5.1			1,570	3,140
76	60	10	62	6.6	11	6.1			2,500	5,490
98	75	13	80	9	14	8.1			3,430	8,040
112	88	13	94	9	14	8.1	20	20	6,080	15,900
134	106	18	112	11	17	11.1			25	25

国际单位: 1N≈0.102kgf
SIUNIT: 1N≈0.102kgf