

SSLMF(K)···DD 不锈钢直线轴承

该类型尺寸是公制的，广泛用于亚洲和其他国家

SSLM···DD (Stainless steel linear bearing)

This type is a metric dimension series widely Used in Asia and other countries




SSLMF···DD



SSLMK···DD

公称轴径 Nominal Shaft diameter mm	圆法兰 SSLMF···DD	重量 Weight (g)	方法兰 SSLMK···DD	重量 Weight (g)	主要尺寸和公差 Major dimensions and tolerance					
					dr		D		L	
					mm	公差 Tolerance μm	mm	公差 Tolerance μm	mm	公差 Tolerance μm
4	SSLMF4	7.8	SSLMK4	6	4	0/-8	8	0/-11	12	± 300
5	SSLMF5DD	17.4	SSLMK5DD	13.4	5	0 -9	10	0 -13	15	
6	SSLMF6DD	23.9	SSLMK6DD	17.7	6		12		19	
8	SSLMF8DD	33.6	SSLMK8DD	26.2	8		15		24	
10	SSLMF10DD	62.7	SSLMK10DD	45.9	10		19	0 -16	29	
12	SSLMF12DD	68.3	SSLMK12DD	51.2	12	0 -10	21		30	
13	SSLMF13DD	80.8	SSLMK13DD	65.8	13		23		32	
16	SSLMF16DD	122.4	SSLMK16DD	101.6	16		28	0 -19	37	
20	SSLMF20DD	162.6	SSLMK20DD	128.9	20	0 -12	32		42	
25	SSLMF25DD	304.4	SSLMK25DD	268.3	25		40		59	
30	SSLMF30DD	412.2	SSLMK30DD	334.8	30		45	0 -22	64	
35	SSLMF35DD	575.1	SSLMK35DD	477.7	35	0/-15	52		70	
40	SSLMF40DD	949.5	SSLMK40DD	776.8	40		60		80	
50	SSLMF50DD	2032.2	SSLMK50DD	1799.9	50		80	0/-25	100	
60	SSLMF60DD	2608.2	SSLMK60DD	2172.6	60		90		110	

SSLMF20 GS DD -S	不标	钢球材质:GCr15	Non-standard	Material GCr15 steel ball
	S	钢球材质:95Cr18	S	Material stainless steel ball
	不标	不锈钢挡圈	Non-standard	Stainless steel retaining ring
	DD	耐腐蚀双密封	DD	Corrosion resistant, double seal
	不标	保持架材质:PA66	Non-standard	Material of cage PA66
	GS	保持架材质:不锈钢	GS	Material stainless steel cage

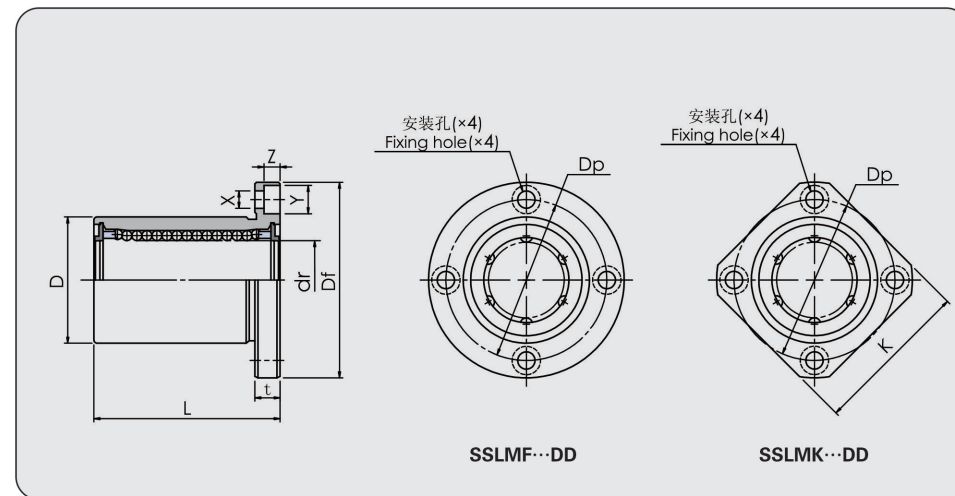

主要尺寸和公差 Major dimensions and tolerance							偏心 Eccentricity μ m	垂直度 Squareness μ m	额定负荷 Basic load rating	
法兰 Flange									动负荷 Dynamic C N	静负荷 Static Co N
Df mm	K mm	t mm	Dp mm	X mm	Y mm	Z mm				
20	16	3.5	14	2.5	4.5	2.1	8	8	88	127
26	21	5	18	3.5	6	3.1			167	206
28	22	5	20	3.5	6	3.1			206	265
32	25	5	24	3.5	6	3.1			274	392
40	30	6	29	4.5	7.5	4.1	12	12	372	549
42	32	6	32	4.5	7.5	4.1			510	784
43	34	6	33	4.5	7.5	4.1			510	784
48	37	6	38	4.5	7.5	4.1			774	1,180
54	42	8	43	5.5	9	5.1	15	15	882	1,370
62	50	8	51	5.5	9	5.1			980	1,570
74	58	10	60	6.6	11	6.1			1,570	2,740
82	64	10	67	6.6	11	6.1			1,670	3,140
96	75	13	78	9	14	8.1	20	20	2,160	4,020
116	92	13	98	9	14	8.1			3,820	7,940
134	106	18	112	11	17	11.1			4,700	10,000